

DS-D5032F3-1V0S 32 inch FHD 75Hz VA Monitor with Speaker



- VA technology, 178° ultra-wide view screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification

Display	
Screen Size	32 inch
Active Display Area	698.4 (H) mm × 392.85 (V) mm
Resolution	1920 × 1080
Backlight	D-LED
Pixel Pitch	0.12125 (H)mm x 0.36375 (V) mm
Brightness	300 cd/m ²
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit
Contrast Ratio	4000 : 1
Response Time	8 ms
Refresh Rate	Typ. 60 Hz, Max. 75 Hz
Haze	Haze 2 %
Reliability	7 × 24 H
Color Gamut	72 % NTSC
Interface	
Video & Audio Input	VGA × 1, HDMI 1.4 × 1, Audio Output × 1
Video & Audio Output	Speaker(8Ω 10W) × 2
Data Transmission Interface	None
Control Interface	None
Power	
Power Supply	100~240 VAC, 50/60 Hz
Power Consumption	≤ 48 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0°C to 40 °C (32 °F to 104 °F)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	100 mm × 100 mm (4 - M6 × 10 mm)
Bezel Width	16.7 mm (top/left/right), 20.5 mm (bottom)
Product Dimensions (W × H × D)	With base: 735.08 (W) mm × 489.16 (H) mm × 207.95 (D) mm Without base: 735.08 (W) mm × 433.46 (H) mm × 80.19 (D) mm
Package Dimensions (W × H × D)	808 (W) mm × 510 (H) mm × 140 (D) mm
Net Weight	4.55 ± 0.5 kg
Gross Weight	6.1 kg ± 0.5 kg
Packing List	Monitor × 1, Base component × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1, remote control × 1, Base screw × 6, Wall-mount screw × 4
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

Physical Interface


Interface	Description	Interface	Description
POWER	AC power input interfac	HDMI	HDMI 1.4 digital signal input interface
VGA	VGA analog signal input	AUDIO OUT	3.5 mm Audio output interface



Available Model

DS-D5032F3-1V0S

Dimension

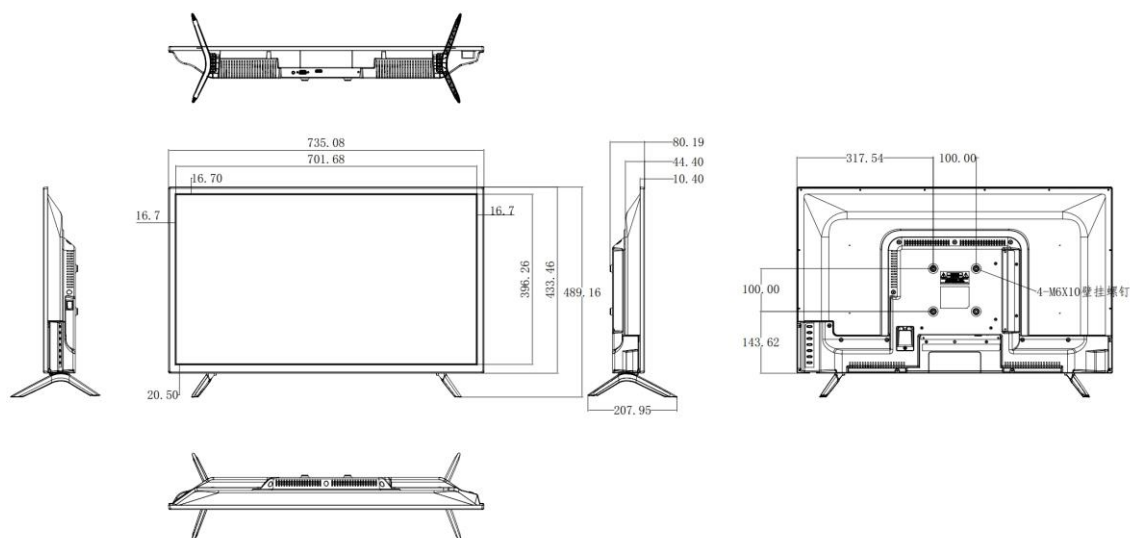

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq